



Revision: Add Ski to tub dam side, 7/2/01

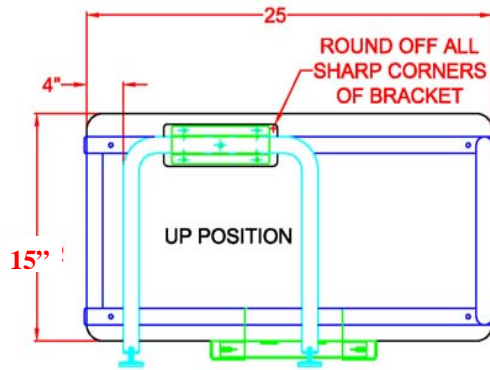

RIGHT SIDE SEAT SHOWN

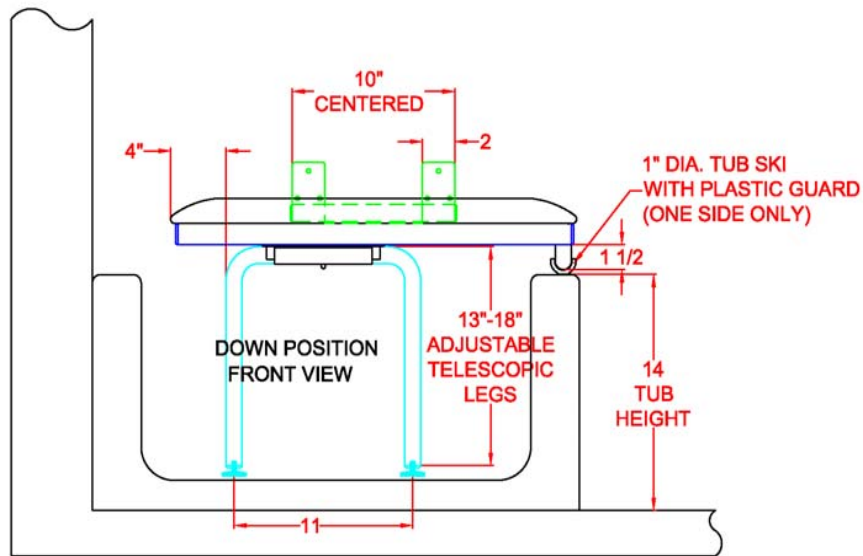

SH-414-2SDL (RIGHT-HANDED)

#### OPERATION:

Seat is held in a raised position by a tension rod placed in the rear crossmember. When seat is lowered into the down position, the swing down leg automatically locks into place with a push-pin button.

#### ARCHITECTURAL SPECIFICATIONS:

**SH-414-2SDL-(L or R)** from Access-Able Designs at 494 53rd Square, Vero Beach FL 32968 phone 877-853-7816 fax 772-872-3200.

**FRAME:** Type 304 (18-8) S.S. tube, 1-1/4" (32 mm) x 18ga. (1.2mm) sq. mainframe with 1" (25mm) x 18ga. (1.2mm) rd. cross members . Leg: "H"-shaped yoke of type 304 (18-8) S.S. tubing, 1" (25mm) x 18ga. (1.2mm) rd. tubing, Heliarc welded to 1-1/4" (32mm) rd. x 12ga. (2.7mm) frame hinge. The swing down legs level when the seat is lowered to a horizontal sitting position. The seat safely stays in raised position by a tension rod inside the rear crossmember.

#### MATERIALS:

**FRAME:** Type 304 (18-8) SS tubing, 1-1/4" (32mm) x 18ga. (1.2mm) sq. main frame with 1" (25m) x 18ga. (1.2mm) rd. cross members.

**WALL FLANGES (2):** Type 304 (18-8) SS . Three mounting holes in each flange.

**SWING DOWN LEGS:** "H" shaped yoke of type 304 (18-8) SS 1" dia. (25mm) x 18ga. (1.2mm) rd. tubing , heliarc welded to 1-1/4" (32mm) rd. x 12ga. (2.7mm) frame hinge couplings.

#### SEAT CHOICES (Designate when ordering)

**NW** or **NA** - White (NW) or Almond (NA) Naugahyde covering 2" (51mm) foam mounted on 1/2" (13mm) marine plywood.

**PW**, **PA** or **PT** - White (PW) or Almond (PA) Teak (PT) finish Phenolic 1/2" (13mm) x 3" (76mm) slats bolted to frame with SS screws.

#### INSTALLATION:

All Shower Seats must only be installed using suitable fasteners and sufficient in-wall backing materials. ADA mounting height for seat in lowered position is 17" (432mm) to 19" (482mm).